

RESEARCH ARTICLE

## Characteristics of Sago Processing Wastewater Effluents released from different Sago Factories in Salem and Namakkal District of Tami Nadu, India

Naganandhini Srinivasan<sup>1\*</sup>, Kiruthika Thangavelu<sup>2</sup>, Ashika Sekar<sup>1</sup> and Sivakumar Uthandi<sup>1</sup>

<sup>1</sup>Biocatalysts Lab Department of Agricultural Microbiology, Tamil Nadu Agricultural University, Coimbatore-641 003

<sup>2</sup>Department of Renewable Energy Engineering, AEC&RI, Tamil Nadu Agricultural University, Coimbatore - 641 003

### ABSTRACT

A study was undertaken to determine the physico-chemical characteristics of sago wastewater (SWW) from various sago industries in Salem and Namakkal districts of India. Besides, different SWW (raw wastewater, aerobic wastewater, treated wastewater and starch wastewater) from within the industry were evaluated. The results concluded that effluents from this region are whitish and greyish brown in color with majority supra-colloidal or settleable suspended solids with high TS, TSS, and TDS. The ammoniacal, nitrate, and nitrite nitrogen ranged from 2.7 to 6.5, 4.5 to 19.1, and 0.4 to 2.8 mg.L<sup>-1</sup>. The total nitrogen content of SWW samples was ranged from 180- 650 mg.L<sup>-1</sup>. The phosphate level of SWW was very high (640-1096 mg.L<sup>-1</sup>). The COD and BOD content of SWW from all the industries ranged from 2560 to 3200 mg.L<sup>-1</sup> and 34000 to 76000 mg.L<sup>-1</sup> indicates its high organic nature. SWW effluents are acidic in nature (pH 4.3-5.2). The free cyanide (CN) content was ranged from 1.2 to 5.2 mg.L<sup>-1</sup>. The treated wastewater had neutral pH (pH - 6.2), and had a reduced level of EC, starch content, TSS, COD and BOD.

Received : 17<sup>th</sup> August, 2020

Revised : 08<sup>th</sup> September, 2020

Accepted : 23<sup>rd</sup> September, 2020

Keywords: *Sago wastewater; Organic load; Treatment; Characteristics; Pollutants*

### INTRODUCTION

Cassava (*Manihot esculenta* spp.), a perennial root shrub belonging to the Euphorbiaceae family, has a starch content of 90 per cent (dry weight). It is a cheap source of nutritional carbohydrate energy (720-1012 kJ. day<sup>-1</sup>) and ranks fourth after rice, sugarcane, maize, and stands fifth amid the starch crops in global production. Many starch factories based on cassava are located in tropical countries. Cassava is grown over an area of about 3 lakh hectares, with the tubers production rate of 58-60 lakhs tonnes. In Tamil Nadu, it is cultivated as an irrigated crop around an area of 82,000 hectares with 800 processing units.

During the extraction of the starch from tapioca tuber, about 20,000 to 30,000 L of water is required per ton of sago, eventually produced the same quantity of wastewater, with high chemical oxygen demand (COD) up to 25 g L<sup>-1</sup> (Sen and Suttar, 2012), biodegradable starch (4-7 g. L<sup>-1</sup>) and cyanide (5 mg. L<sup>-1</sup>). Cyanide is extremely toxic, and it has a significant impact even at very low concentrations (1-2 mM) on many species (Potivichayanon et al., 2020). The untreated effluents released from the sago industries affect the soil health, plants, animals, natural ecosystems, and human beings (Ruban et

al., 2013). The fermentation of residues can lead to the production of CO<sub>2</sub>, acetic, and lactic acids, which add to intense odors (Cumbana et al., 2007); it leads to serious environmental pollution.

Therefore, a considerable effort is needed to identify economic methods to reduce this pollution load. First of all, clear knowledge of the quality, quantity, and temporal changes in the composition of the effluent is needed for the successful treatment of wastewater. Physicochemical characterization is essential in order to finely identify the characteristics of a treatment method going to apply. Additionally, certain physico-chemical characteristics present a preliminary evaluation of the quality and degree of pollution of wastewater. The objective of the present study is, therefore the characterization and quantification of the organic contaminants (BOD, COD, TSS, nitrate, phosphate, cyanide, etc.,) of the sago processing wastewater.

### MATERIAL AND METHODS

#### Study Area

Salem and Namakkal districts in Tamil Nadu are the tapioca processing clusters in India where large-scale production and tapioca processing is carried out. Nearly 34,000 acres of land is under tapioca

\*Corresponding author's e-mail: usiva@tnau.ac.in

cultivation and popularly called for the land of sago. The present study was carried out in Salem and Namakkal Sago cluster areas. Site selection is based on the intensity of the small-scale manufactures in producing sago and wastewater disposal locations directly to the environment.

### Collection of sago processing wastewaters from different locations

The sago processing wastewater (SWW) was collected in the airtight container from different sago industries located at the Salem and Namakkal districts of Tamil Nadu, India. The industry name, area, and geographical location are presented in Table 1 and Figure 1a. The different SWW such as raw wastewater, aerobic wastewater, treated wastewater, and starch wastewater were collected from different unit operation within the industry (TA Perumal starch industry) Figure 1b. The collected wastewaters were immediately stored at 4 °C until used for further experiments and analysis.

### Physico-chemical property analysis

The physicochemical parameters (pH, EC, TDS, TS, salinity, total soluble starch, COD, and BOD) of SWW samples collected from various sago industries and different unit operations within the industry were analyzed as per the standard method of examining water and wastewater analysis (APHA, 2005). Macronutrients such as nitrogen (ammoniacal and nitrated) and phosphorous in wastewater were estimated in accordance with the supplier's protocol by the probe photometer kits (Palintest 7500 Photometer, USA).

### Cyanide estimation

The cyanide content was calculated by modifying the picric acid method (Fisher and Brown, 1952). A linear calibration curve was obtained with the standard cyanide solutions as follows: aliquots (0.05 mL) of cyanide solutions (after centrifugation at 15,000 g for 10 min at 4 °C) were added to 0.1 mL aliquots of a solution containing 0.5% (w/v) picric acid and 0.25 M Na<sub>2</sub>CO<sub>3</sub>. The resulting solution was put in a boiling water bath for 5 min, diluted to 1 mL with 0.85 mL of distilled water, and cooled for 30 min in tap water. At 520 nm, the absorbance was read against a blank of distilled water and picric acid reagent along with samples.

### Statistical analysis

All experiments were performed in triplicate, and the average values with standard deviation were considered. Statistically significant differences between the physico-chemical properties between the industries were examined using one-way analysis of variance (ANOVA) and Duncan's multiple range test (DMRT) at 5% significance level.

## RESULTS AND DISCUSSION

### Physico-chemical characteristics of SWW from various sago industries

The physico-chemical characters of SWW from various industries are presented in Table 2. From the results, it was known that every industry had released its unique characteristic wastewater that depends on processing steps and raw materials.

**Table 1. Industry name, geographical coordinates and area of the SWW collection sites used in the present study**

Google map code	Name of industry	Geographical coordinates of sampling site		Area detail
		Latitude	Longitude	
A	SreeSelliamman sago factory	11.50 N	78.10 E	Thatchankadu, Alavaipatti, Nammakal, Tamil Nadu-637505
B	TA Perumal starch industries	11.65 N	78.11 E	Ezhil Nagar, Sivathapuram, Kanthampatty, Salem, Tamil Nadu-636005
C	Sri Senthil Andhavar sago factory	11.59 N	78.61 E	Eachampatti road, Attur taluk, Salem, Tamil Nadu-636141
D	S.R.T. Sago factory	11.55 N	78.63 E	Attur - Rasipuram - Erode Rd, Tamil Nadu 636108

During the sago extraction process, tapioca roots are washed, debarked, rasped before milling or pulping process. The starch in the slurry is removed in these processes and left to be resettled, than compacted and agglomerated (Patle and Lal, 2008). During the entire production process, a large amount of water (20 litres of wastewater per kg of sago starch production) would be discharged as sago wastewater effluents.

The color of the SWW effluent samples observed in the present study was greyish to dark brown with whitish settlements due to the fermentation of remaining starch in the SWW. The changes of color are most probably due to the degradation of organic content in the effluents reacted to the microbial activities and anaerobic conditions (Tchobanoglous et al., 2014). SWW temperature ranges from 26.1- 28.0°C; this is the optimum temperature for

microbial growth. The pH of SWW from all the four factories was highly acidic ranged from 4.3 to 5.4

due to the release of hydrogen cyanide (HCN) from cassava tubers and the addition of sulphuric acid during the extraction process.

**Table 2. Physico-chemical characteristics of SWW collected from different sago industries.**

Properties	Sago Industries			
	A*	B	C	D
Color	Greyish	Greyish	Brown	Dull white
Odor	Pungent	Pungent	Pungent	Pungent
PH	4.7 ( 0.1) <sup>b</sup>	4.3( 0.0) <sup>c</sup>	4.3 ( 0.0) <sup>c</sup>	5.4 ( 0.0) <sup>a</sup>
EC (dSm <sup>-1</sup> )	6.2 ( 0.1) <sup>a</sup>	3.3( 0.1) <sup>b</sup>	6.2 ( 0.0) <sup>a</sup>	3.7 ( 0.0) <sup>b</sup>
Salinity (mg. L <sup>-1</sup> )	4656.7 ( 80.1) <sup>a</sup>	2460.0( 0.123) <sup>b</sup>	4533.3 ( 33.3) <sup>b</sup>	4100.0 ( 100.0) <sup>b</sup>
Temperature ( °C)	24.9 ( 0.3) <sup>a</sup>	26.9( 0.3) <sup>a</sup>	24.8 ( 0.3) <sup>a</sup>	24.7 ( 0.2) <sup>a</sup>
Ammonium N <sub>2</sub> (mg. L <sup>-1</sup> )	5.2 ( 0.0) <sup>a</sup>	ND	2.7 ( 0.0) <sup>b</sup>	6.5 ( 1.1) <sup>a</sup>
Nitrate N <sub>2</sub> (mg. L <sup>-1</sup> )	4.5 ( 0.0) <sup>c</sup>	ND	19.1 ( 0.9) <sup>a</sup>	7.9 ( 0.2) <sup>b</sup>
Nitrite N <sub>2</sub> (mg. L <sup>-1</sup> )	0.4 ( 0.0) <sup>c</sup>	ND	2.8 ( 0.6) <sup>a</sup>	1.7 ( 0.0) <sup>b</sup>
Phosphate (mg. L <sup>-1</sup> )	1096.0 ( 58.4) <sup>a</sup>	128.3 ( 31.1) <sup>c</sup>	1056.7 ( 37.1) <sup>a</sup>	640.0 ( 17.3) <sup>b</sup>
Total N <sub>2</sub> (mg. L <sup>-1</sup> )	650.0 ( 23.1) <sup>a</sup>	180.0 ( 34.9) <sup>c</sup>	436.7 ( 12.0) <sup>b</sup>	383.3 ( 14.5) <sup>b</sup>
TDS (mg. L <sup>-1</sup> )	4053.3 ( 61.7) <sup>a</sup>	2311.9 ( 12.1) <sup>b</sup>	4073.3 ( 6.7) <sup>a</sup>	2423.3 ( 3.3) <sup>b</sup>
TSS (mg. L <sup>-1</sup> )	310.0 ( 37.9) <sup>d</sup>	2420.8 ( 234.0) <sup>c</sup>	6666.7 ( 833.3) <sup>a</sup>	4166.7 ( 833.3) <sup>b</sup>
TS (mg. L <sup>-1</sup> )	5066.7 ( 159.0) <sup>b</sup>	5921.0 ( 54.1) <sup>b</sup>	6900.0 ( 100.0) <sup>a</sup>	2316.7 ( 447.5) <sup>c</sup>
DO (mg. L <sup>-1</sup> )	8106.7 ( 53.3) <sup>a</sup>	6200.9 ( 12.2) <sup>b</sup>	7840.0 ( 576.9) <sup>a</sup>	8213.3 ( 232.5) <sup>a</sup>
BOD (mg. L <sup>-1</sup> )	2613.3 ( 106.7) <sup>a</sup>	4650.0 ( 67.1) <sup>a</sup>	2560.0 ( 461.9) <sup>a</sup>	3200.0 ( 160.0) <sup>a</sup>
COD (mg. L <sup>-1</sup> )	34000.0 ( 2000.0) <sup>b</sup>	11625.0 ( 256.1) <sup>c</sup>	76000.0( 6928.2) <sup>a</sup>	74666.7( 8110.4) <sup>a</sup>
Soluble starch (mg.L <sup>-1</sup> )	4820.0 ( 390.0) <sup>c</sup>	3233.0 ( 0.7) <sup>c</sup>	6100.0 ( 0.8) <sup>b</sup>	12930.0( 0.1) <sup>a</sup>

Values represent mean (±standard error) (n=3) and values followed by the same letter in each column are not significantly different from each other as determined by DMRT ( $p \leq 0.05$ ).

ND - Not determined, EC - Electrical Conductivity, dSm-1, DeciSiemens per metre. TDS – Total dissolved solids, TSS - Total suspended solids, TS - Total solids, DO – Dissolved oxygen, BOD - Biological oxygen demand, COD - chemical oxygen demand.

\* Adopted from published data Kiruthika et al., 2020

The entire process emitting obnoxious awful smell thus cause pollution and deteriorating the environment quality globally (Ibrahim et al., 2006

; Yunus et al., 2014). The EC and (3.3 - 6.2 dSm<sup>-1</sup>) and salinity of SWW (2460.0- 4656.7 mg. L<sup>-1</sup>) were varied, highest recorded in the industry A and C.

**Table 3. Physiochemical characteristics of different types of SWW collected from different unit operation within industry**

Properties	Raw wastewater	Aerobic wastewater	Treated wastewater	Starch wastewater
Color	Dirty White	Dirty White	Dark Brown	Dirty White
Odour	Pungent	Light pungent	Light pungent	Pungent
pH	4.5	6.4	6.9	4.1
EC (dsm <sup>-1</sup> )	3.07	2.60	2.56	2.67
Salinity (mg. L <sup>-1</sup> )	2271	1962	1930	2024
Temperature ( °C)	26.9	26.1	26.4	26.7
Total N <sub>2</sub> (mg. L <sup>-1</sup> )	693.1	440.2	880.4	117.4
TSS (mg. L <sup>-1</sup> )	1272	1858	1414	1472
DO (mg. L <sup>-1</sup> )	6.4	6.4	7.2	6.4
BOD (mg. L <sup>-1</sup> )	4800	4000	3200	4800
COD (mg. L <sup>-1</sup> )	8800	6400	5600	7200
Soluble starch (mg. L <sup>-1</sup> )	3767	2348	1698	4067

EC - Electrical Conductivity, TSS - Total suspended solids, DO – Dissolved oxygen, BOD - Biological oxygen demand, COD - chemical oxygen demand.


The nutrients such as nitrogen (ammoniacal and nitrate) and phosphorus were sufficiently present in all the industrial effluents to support microbial

growth. The ammoniacal, nitrate, and nitrite nitrogen ranged from 2.7 to 6.5 mg. L<sup>-1</sup>, 4.5 to 19.1 mg. L<sup>-1</sup> and 0.4 to 2.8 mg. L<sup>-1</sup>, respectively. The total nitrogen

content of SWW samples was ranged from 180- 650 mg. L<sup>-1</sup>. The phosphate level of SWW was very high (640-1096 mg. L<sup>-1</sup>) in all the industries compared to its nitrogen content.

Due to its diverse densities of substances, i.e., the settleable, suspended, and floatable solids material, the wastewater effluent samples were

easily settled into three layers of notifiable upper, middle, and lower layers. In general, the TS, TSS, and TDS content of SWW samples in the present study were high due to the presence of rich carbohydrates, fibres and dense suspended solids, unextracted starch, cellulose (fibrous residue from pith), nitrogenous compounds, cyano glucosides and insoluble fibres.

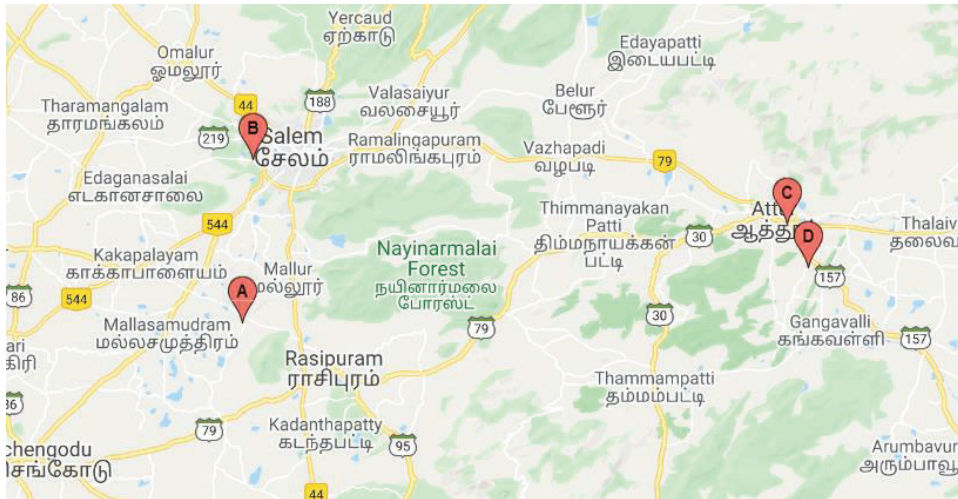


**Fig. 1b. Geographical location of the industries in Google map**

The COD and BOD content of SWW from all the industries ranged from 2560 to 3200 mg. L<sup>-1</sup> and 34000 to 76000 mg. L<sup>-1</sup> indicates the high organic nature of SWW. The content of BOD and COD has exceeded the quality standard recommended by the central pollution control board (100 and 300 mg. L<sup>-1</sup>).

**Physico-chemical characteristics of SWW collected from different unit operation within the industry**

Different sago industries released their unique SWW vary in their properties. Similarly, within the industry, every unit operation has an impact on the

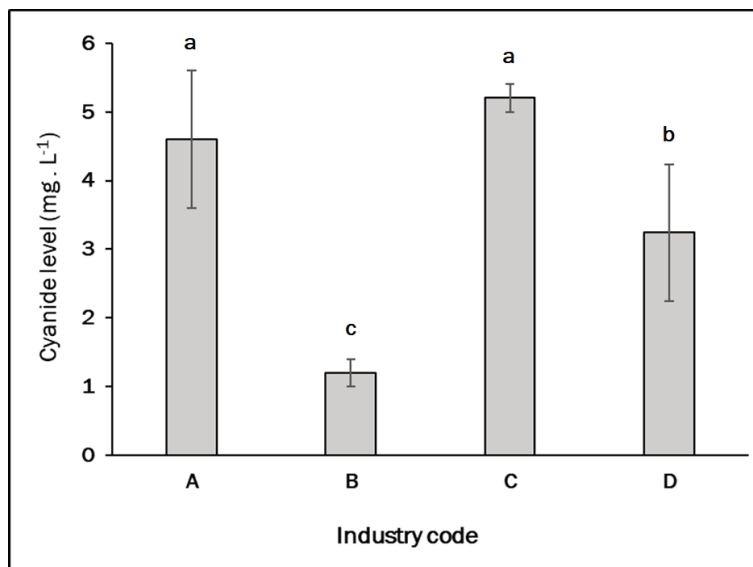

**Figure 2. Cyanide level observed in different sago industries**

characteristics of wastewater. To study their impact in detail, four kinds of wastewaters were collected within the industry itself. Raw wastewater, which

was released entirely after the starch extraction process into the wastewater storage tank 2. Aerobic water, which was collected from the initial

wastewater aerobic treatment system, 3. Treated water, collected from final anaerobic treatment system 4. Starch water is directly collected from the starch settling tank. The results are presented in Table 3. When comparing their properties, the treated wastewater had neutral pH (pH - 6.2), and had a reduced level of EC, starch content, TSS, COD. The soluble starch content in the treated wastewater was low compared to other wastewater due to the microbial fermentation process. Surprisingly the total nitrogen content of treated water was high compared to other wastewater may be due to the release of both organic and mineral nitrogen during the anaerobic treatment process.

### **Cyanide toxicity level**

The potential cyanide content in tapioca varies with the variety, the environmental conditions, and the time of harvest. During the starch extraction process, cyanide bounded in tapioca roots was hydrolyzed with hydrogen cyanide released into the wastewater by linamarase in the tapioca tissue (Arotupin 2007; Sujatha Kandasamy et al., 2015). The level of release depends on the concentration of the enzyme. In the present study, the significant ( $p < 0.05$ ) difference observed in the cyanide level, the free cyanide (CN) content was ranged from 1.2 to 5.2 mg. L<sup>-1</sup> (Figure 2). In other studies, the cyanide concentration in SWW has been reported to range between 10.4 and 274 mg.L<sup>-1</sup> depending on the cyanoglycoside content of the tapioca varieties (Siller and Winter, 1998; Balagopalan and Rajalekshmy 1998).

### **CONCLUSION**

The present study demonstrated a detailed physico-chemical variations of sago wastewater from the different scaled industrial units. The various parameters of SWW were possessed higher values than the levels stipulated by the Tamil Nadu Pollution Control Board. Hence, necessary action should be taken to treat the wastewater effectively, which could be recycled. The treated wastewater had neutral pH (pH - 6.2) and had a reduced level of EC, starch content, TSS, COD and BOD.

### **FUNDING AND ACKNOWLEDGMENT**

We thanked the DBT-Biodiesel project on "Biodiesel production: Sago processing industrial wastewater as feedstock's for the microbial production of oil and derived co-products" (File No.BT/PR8280/PBD/26/382/2013 dated. 20.03.2015)" for financial support granted to SU.

### **Ethics statement**

No specific permits were required for the described field studies because no human or animal subjects were involved in this research.

### **Originality and plagiarism**

Authors should ensure that they have written and submit only entirely original works.

### **Consent for publication**

All the authors agreed to publish the content.

### **Competing interests**

There was no conflict of interest in the publication of this content

### **Data availability**

All the data of this manuscript are included in the MS.

### **Author contributions**

Research grant, Idea conceptualization- US; Experiments- SN, KT, AS; Guidance- US; Writing-original draft- SN, KT; Writing- reviewing & editing -US.

### **REFERENCES**

- APHA, 2005. Water Environment Federation. Standard methods for the examination of water and wastewater. Washington, DC.
- Arotupin, D. J. 2007. Evaluation of microorganisms from cassava waste water for production of amylase and cellulase. *Res. J. Microbiol.* **2(5)**: 475-480.
- Balagopalan, C and L. Rajalekshmy. 1998. Cyanogen accumulation in environment during processing of cassava (*Manihot esculenta* Crantz) for starch and sago. *Water Air Soil Pollut*, **102**: 407-413.
- Cumbana, Arnaldo, Estevao Mirione, Julie Cliff, and J Howard Bradbury. 2007. "Reduction of cyanide content of cassava flour in Mozambique by the wetting method." *Food chemistry* **101** (3):894-897
- Fisher, F. B and J. S. Brown. 1952. Colorimetric determination of cyanide in stack gas and wastewater. *Anal Chem.* **24(9)**:1440-1444.
- Hammado, N and S. U. Budiyo. 2018. Physicochemical Characteristic of Sago Hampas and Sago Wastewater in Luwu Regency. *E3S Web of Conferences* **73**: 1-3.
- Ibrahim, S., Vikineswary, S., Sujjat, A. A., and L.L. Chong. 2006. The effects of light intensity, inoculum size and cell immobilization on the treatment of sago effluent with *Rhodospseudomonas palustris* Strain B1. *Biotechnol Bioprocess Eng.*, **11**:377-381.
- Patle, S and B. Lal. 2008. Investigation of the potential of agro-industrial material as low-cost substrate for ethanol production by using *Candida tropicalis* and *Zymomonas mobilis*. *Biomass Bioenerg.* **32(7)**:596-602.
- Potivichayanon, S., Toensakes, R., Supromin, N. and K. Seaung, 2020. Removal of High Levels of Cyanide and COD from Cassava Industrial Wastewater by a Fixed-Film Sequencing Batch Reactor. *Water Air and Soil Pollution*, **231(6)**.
- Ruban, P, T Sangeetha, and S Indira. 2013. "Starch waste as a substrate for amylase production by sago effluent isolates *Bacillus subtilis* and

- Aspergillusniger." *American Eurasian J. Agric & Environ. Sci* **13** (1):27-31.
- Sen, Biswarup, and Rahul R Suttar. 2012. "Mesophilic fermentative hydrogen production from sago starch-processing wastewater using enriched mixed cultures." *international journal of hydrogen energy* **37** (20):15588-15597.
- Siller, H and J. Winter. 1998. Degradation of cyanide in agroindustrial or industrial wastewater in an acidification reactor or in a single-step methane reactor by bacteria enriched from soil and peels of cassava. *Appl Microbiol Biotechnol*, **50**: 384–389.
- Sujatha, K., Balachandar, D., Kumar, K and B. Gero. 2015. Aerobic cyanide degradation by bacterial isolates from cassava factory wastewater *Brazilian J Microbiol.*, **46**(3): 659-666
- Tchobanoglous, G., Stensel, H. D., Tsuchihashi, R., Burton, F. L., and G. Bowden. 2014. *Wastewater engineering: treatment and resource recovery* (5th Ed.). NY: McGraw-Hill Education.
- Thangavelu, K., Sundararaju, P., Srinivasan, N., Muniraj, I and S. Uthandi. 2020. Simultaneous lipid production for biodiesel feedstock and decontamination of sago processing wastewater using *Candida tropicalis* ASY2. *Biotechnol for Biofuels*, **13**(1): 1-14.
- Yunus, N., Jahim, M. J., Anuar, N., Abdullah, R. S. S and T.N. Kofli. 2014. Batch fermentative hydrogen production utilising sago (*Metroxylon* sp.) starch processing effluent by enriched sago sludge consortia. *Int. J Hydrogen Energ*, **39**: 19937-19946